


高壓型不鏽鋼濾芯機

Stainless Steel High Pressure Cartridge Filter Housings



濾芯規格	5, 10, 20, 30, 40 inch
濾芯支數	3支, 4支, 5支, 7支, 9支, 12支
材 質	SUS304, SUS316, SUS316L
口 徑	1, 1 1/2, 2, 2 1/2, 3, 4 inch 牙口、法蘭、衛生級接頭及各種規格
流 量	10" : 0 ~ 7 CMH 20" : 0 ~ 14 CMH 30" : 0 ~ 21 CMH 40" : 0 ~ 28 CMH 上述流量為一般PP熔噴式濾芯流量 實際流量會依濾材規格不同而有差別 可選用大流量濾芯來提高流量降低壓差
濾機型式	螺栓型
操作壓力	10 bar
適用範圍	RO前後置過濾, PCW過濾, 循環過濾, 化學品製程, 回收水過濾, 飲料業

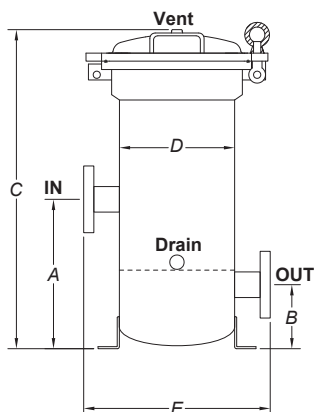

Model	A	B	C	øD	E
UFCG10 3~4	280	120	661	180	300
UFCG20 3~4	280	120	926	180	300
UFCG30 3~4	280	120	1181	180	300
UFCG40 3~4	280	120	1353	181	300
UFCG10 5~7	280	120	664	232	350
UFCG20 5~7	280	120	929	232	350
UFCG30 5~7	280	120	1184	232	350
UFCG40 5~7	280	120	1439	232	350
UFCG10 8~12	600	350	924	306	506
UFCG20 8~12	700	350	1179	306	506
UFCG30 8~12	700	350	1434	306	506
UFCG40 8~12	700	350	1689	306	506

unit: mm