


Absolute-Rated Melt-Blown Filter Cartridges

The fibers are tightly fixed from the outside to the inside, and particles will not be released due to the pump pressure or high differential pressure. Filtration efficiency up to 99% and applicable to industries with strict processes.



- State of the art Japan microfiber technology can reach up to 99% filtration efficiency
- Progressive absolute pore size structure enhances the dirt holding capacity
- Rigid structure keeps the contaminant from release
- Capture flexible particles
- 100% Polypropylene material. No adhesive. Good chemical compatibility. No fiber release
- PP material is FDA 21 CFR compliant
- NSF/ANSI 42 certified

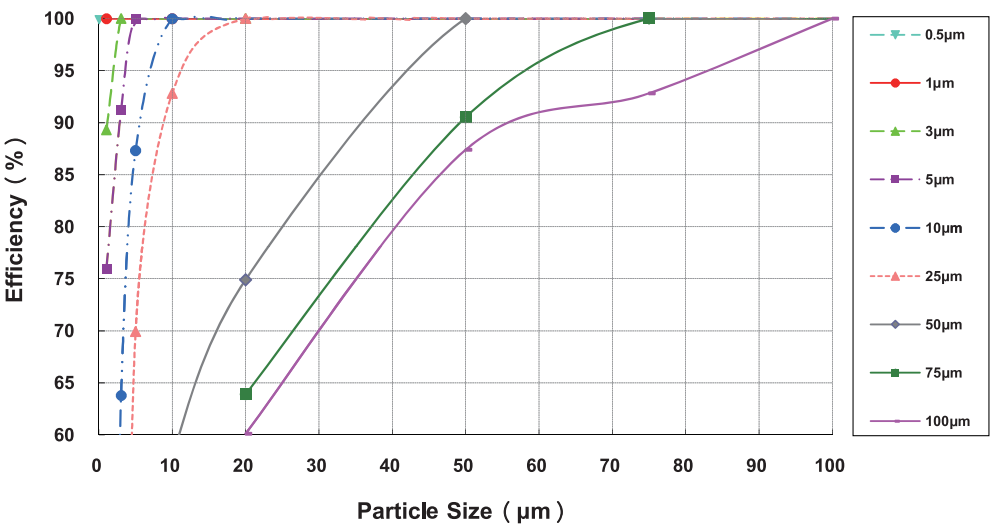

Material	Polypropylene
Length	5, 6, 9.75, 10, 19.5, 20, 29.25, 29.5, 30, 39, 40 inch and Customization
Micron Rating	0.5, 1, 3, 5, 10, 25, 50, 75, 100 µm
End Cap	DOE, 2-222 Flat, 2-222 Fin, 2-226 Flat, 2-226 Fin
Operating Data	ΔP : 4.0 bar at 25°C, 2.0 bar at 60°C, 1.0 bar at 80°C
Applications	Flexible Particles Involving Process, Electroplating, Chemical and Petrochemical Processing, High Temperature and Pressure Manufacturing Process