
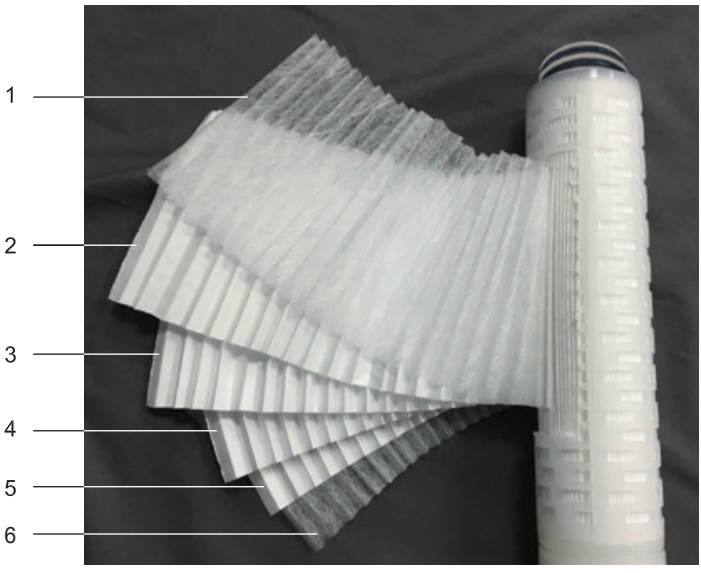


CMP Series Pleated Filter Cartridges

- CMP pleated filter cartridge adopts multi layers of different micron rating, with progressive cascading to achieve the result of layered filtration and precise
- Outer loose and inner dense fiber structure increase the capacity and extend the service life, enhance the interception capacity for different particle sizes
- Use membrane media with stable welding enable better filtration efficiency by avoiding bridging phenomenon
- Customized by different demands

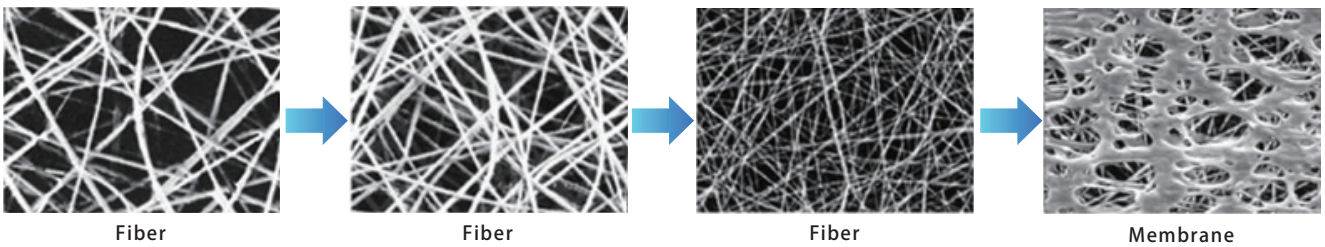

No.	Description
1	Inflow Support Layer
2	10μm
3	5μm
4	1μm
5	0.5μm
6	Outflow Support Layer

Material	Polypropylene
Length	10, 20, 30 inch
Micron Rating	0.1, 0.2, 0.5, 0.8, 1, 3, 5, 7, 9, 11, 13, 15 μm
End Cap	2-222 Flat
Operating Data	ΔP : 4.8 bar at 25°C
Applications	CMP Process