
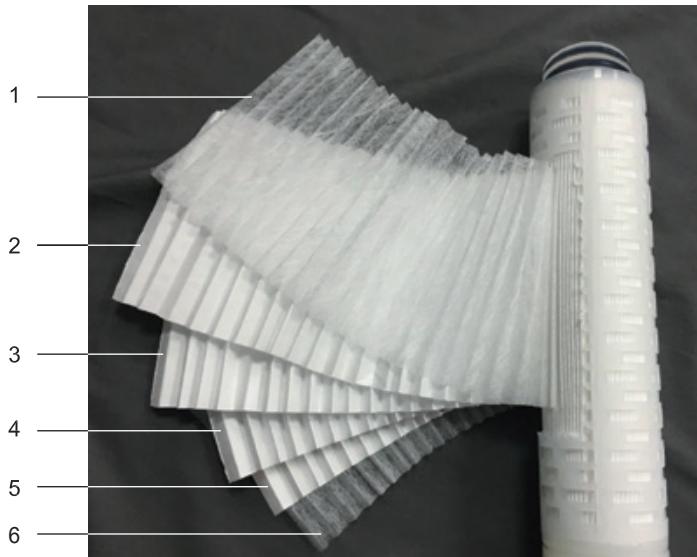


CMP Series Pleated Filter Cartridges

- CMP pleated filter cartridge adopts multi-layer of different micron rating, with progressive cascading to achieve the result of layered filtration and precise
- Outer loose and inner dense fiber structure increases the capacity and extends the service life, enhances the interception capacity for different particle sizes
- Using membrane media with stable welding enables better filtration efficiency by avoiding bridging phenomenon
- Customized by different demands

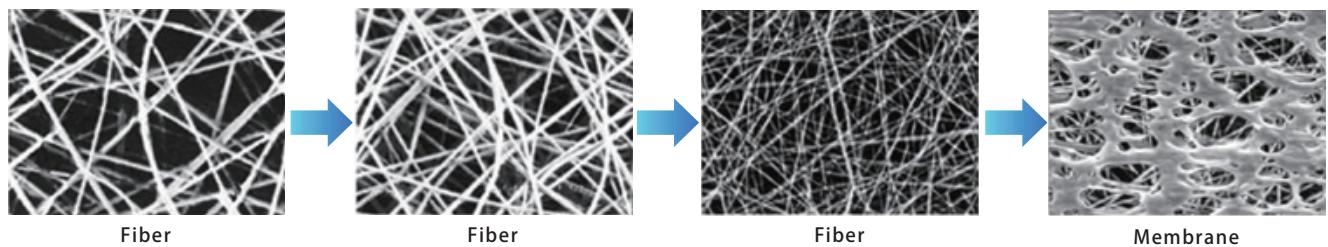

No.	Description
1	Inflow Support Layer
2	10µm
3	5µm
4	1µm
5	0.5µm
6	Outflow Support Layer

Material	Polypropylene
Length	10, 20, 30 inch
Micron Rating	0.1, 0.2, 0.5, 0.8, 1, 3, 5, 7, 9, 11, 13, 15 µm
End Cap	2-222 Flat
Operating Data	ΔP : 4.8 bar at 25°C
Applications	CMP Process