



## Melt-Blown Filter Cartridges

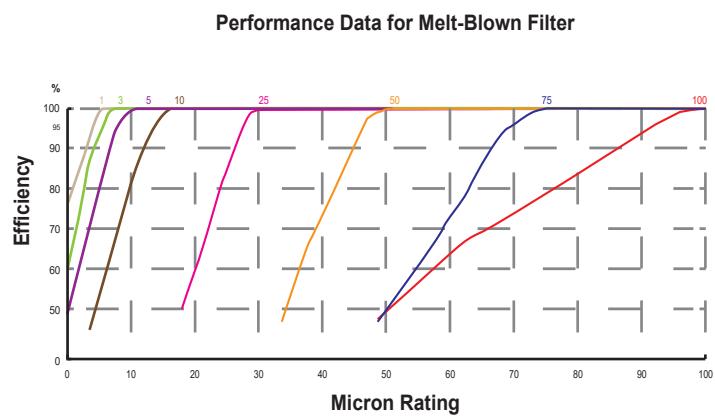

PP material is molten and directly sprayed with high temperature and pressure to be three-layer structure. Filter is inside with dense fibers and outside with loose ones. This design allows it to capture particles of varying sizes. The usability of this melt-blown filter make them the ideal pre-filters for most industrial processes.

- Produced by superfine PP fibers. Presenting great filtration efficiency
- Three-layer design enhances dirt holding while maintain the longer service life
- Filter surface and inner core are free from fiber release
- Stable structure design prevents the release of contaminants
- 100% Polypropylene material. No adhesive. Good chemical compatibility. No fiber release
- PP material is FDA 21 CFR compliant

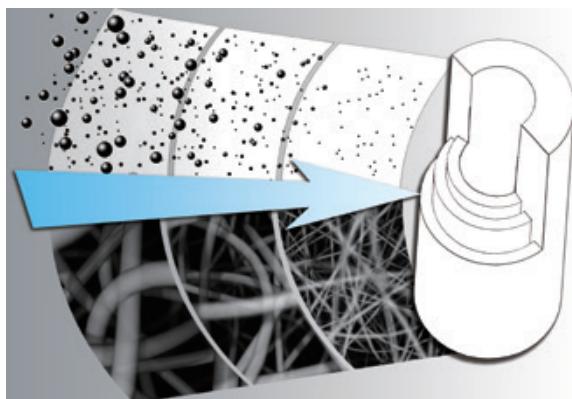

Material	Polypropylene
Length	5, 6, 9.75, 10, 19.5, 20, 29.5, 30, 39, 40 inch and Customization
Micron Rating	1, 5, 10, 25, 50, 75, 100 $\mu\text{m}$
End Cap	DOE, 2-222 Flat, 2-222 Fin, 2-226 Flat, 2-226 Fin
Operating Data	$\Delta P$ : 3.0 bar at 25°C, 2.0 bar at 40°C, 1.0 bar at 60°C
Applications	PCB, Electroplating, Reverse Osmosis Pretreatment, Reclaimed Water Treatment, Chemical and Petrochemical Processing, Food and Beverage