


Stainless Steel Cartridge Filter Housings



Filter Length	5, 10, 20, 30, 40 inch
Number of Cartridges	3 ~ 7 rounds
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	1, 1 1/2, 2, 2 1/2, 3, 4 inch NPT, BSP, Flange, Clamp, or others
Flow Rate	10" : 0 ~ 7 CMH 20" : 0 ~ 14 CMH 30" : 0 ~ 21 CMH 40" : 0 ~ 28 CMH *Above flow rate is based on standard PP melt blown cartridge; Flow rate may vary according to different filter elements
Closure Type	V-Clamp
Max. Operating Pressure	7 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Beverage Industry

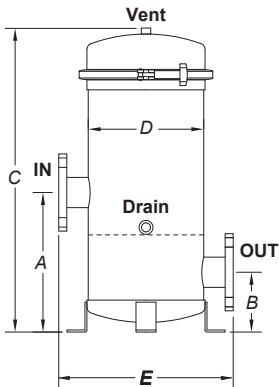

Model	A	B	C	øD	E
UFC10 3 ~ 4	280	120	617	180	300
UFC20 3 ~ 4	280	120	882	180	300
UFC30 3 ~ 4	280	120	1137	180	300
UFC10 5 ~ 7	280	120	611	232	352
UFC20 5 ~ 7	280	120	877	232	352
UFC30 5 ~ 7	280	120	1132	232	352
UFC40 5 ~ 7	280	120	1387	232	352

unit: mm