


Stainless Steel High Pressure Cartridge Filter Housings



Filter Length	5, 10, 20, 30, 40 inch
Number of Cartridges	3 ~ 12 rounds
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	1, 1 1/2, 2, 2 1/2, 3, 4 inch NPT, BSP, Flange, Clamp, or others
Flow Rate	10" : 0 ~ 7 CMH 20" : 0 ~ 14 CMH 30" : 0 ~ 21 CMH 40" : 0 ~ 28 CMH *Above flow rate is based on standard PP melt blown cartridge; Flow rate may vary according to different filter elements High flow filter is optional to increase the flow and reduce the differential pressure
Closure Type	Swing Bolt
Max. Operating Pressure	10 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Beverage Industry

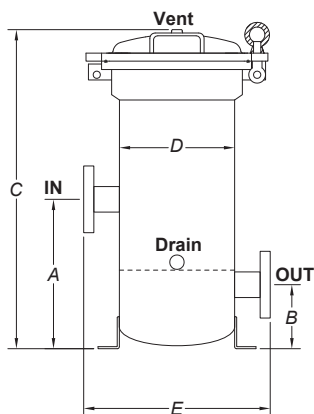

Model	A	B	C	øD	E
UFCG10 3 ~ 4	280	120	661	180	300
UFCG20 3 ~ 4	280	120	926	180	300
UFCG30 3 ~ 4	280	120	1181	180	300
UFCG40 3 ~ 4	280	120	1353	181	300
UFCG10 5 ~ 7	280	120	664	232	350
UFCG20 5 ~ 7	280	120	929	232	350
UFCG30 5 ~ 7	280	120	1184	232	350
UFCG40 5 ~ 7	280	120	1439	232	350
UFCG10 8 ~ 12	600	350	924	306	506
UFCG20 8 ~ 12	700	350	1179	306	506
UFCG30 8 ~ 12	700	350	1434	306	506
UFCG40 8 ~ 12	700	350	1689	306	506

unit: mm