

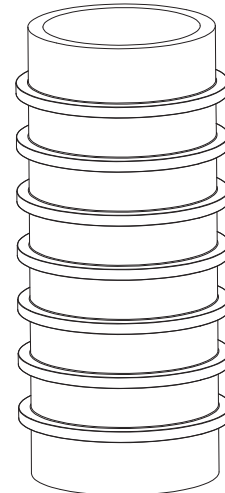
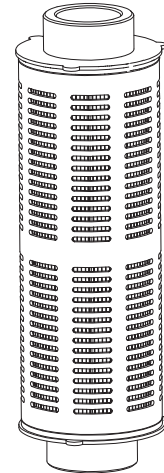


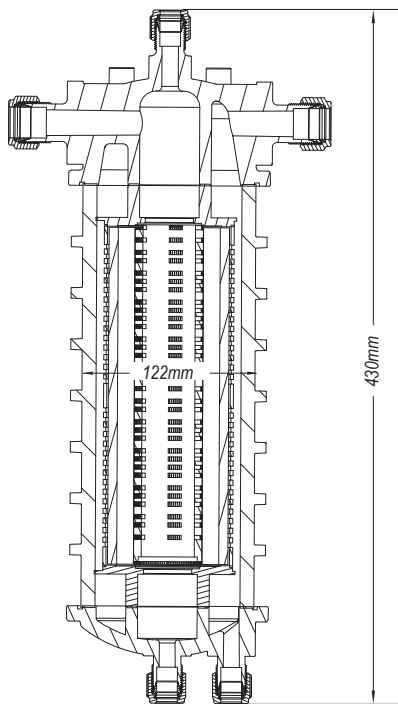


ALL PFA Filter Cartridges for Wet Processing T Type

Material	PFA
Filter Media	Hydrophobic PTFE, Hydrophilic PTFE
Inlet/Outlet	3/4" Super
Vent/Drain	1/2" Super
Micron Rating	0.03, 0.05, 0.1, 0.2µm
Max. Operating Temperature	200°C
Operating Data	5.8 bar at 25°C, 0.97 bar at 200°C
Applications	Wet Etch and Clean, Fine Chemicals, Solvents

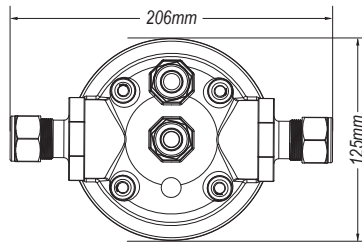

ALL PFA Filter Cartridges for Wet Processing L Type

Material	PFA
Filter Media	Hydrophobic PTFE, Hydrophilic PTFE
Inlet/Outlet	3/4" Super
Vent/Drain	1/2" Super
Micron Rating	0.03, 0.05, 0.1, 0.2µm
Max. Operating Temperature	200°C
Operating Data	5.8 bar at 25°C, 0.97 bar at 200°C
Applications	Wet Etch and Clean, Fine Chemicals, Solvents

