


High-Flow Multi-Cartridge Filter Housings



Model	A	B	C	øD	E
UFC20 8 ~ 12	700	350	1400	306	506
UFC30 8 ~ 12	700	350	1655	306	506
UFC40 8 ~ 12	700	350	1905	306	506
UFC20 13 ~ 20	700	350	1415	406	606
UFC30 13 ~ 20	700	350	1670	406	606
UFC40 13 ~ 20	700	350	1920	406	606
UFC20 21 ~ 28	700	350	1437	486	686
UFC30 21 ~ 28	700	350	1692	486	686
UFC40 21 ~ 28	700	350	1942	486	686
UFC20 29 ~ 36	700	350	1523	560	760
UFC30 29 ~ 36	700	350	1778	560	760
UFC40 29 ~ 36	800	400	2028	560	760
UFC20 37 ~ 46	800	400	1529	600	800
UFC30 37 ~ 46	800	400	1784	600	800
UFC40 37 ~ 46	800	400	2034	600	800
UFC20 47 ~ 56	850	450	1587	650	850
UFC30 47 ~ 56	850	450	1842	650	850
UFC40 47 ~ 56	850	450	2092	650	850
UFC20 57 ~ 81	950	500	1710	762	962
UFC30 57 ~ 81	950	500	1965	762	962
UFC40 57 ~ 81	950	500	2215	762	962
UFC20 82 ~ 95	1000	550	1895	900	1100
UFC30 82 ~ 95	1000	550	2150	900	1100
UFC40 82 ~ 95	1000	550	2400	900	1100
UFC20 96 ~ 135	1100	600	1985	1000	1200
UFC30 96 ~ 135	1100	600	2240	1000	1200
UFC40 96 ~ 135	1100	600	2490	1000	1200
UFC20 136 ~ 155	1250	650	2090	1100	1300
UFC30 136 ~ 155	1250	650	2345	1100	1300
UFC40 136 ~ 155	1250	650	2595	1100	1300
UFC20 156 ~ 173	1250	650	2095	1220	1400
UFC30 156 ~ 173	1250	650	2350	1220	1400
UFC40 156 ~ 173	1250	650	2600	1220	1400

unit: mm

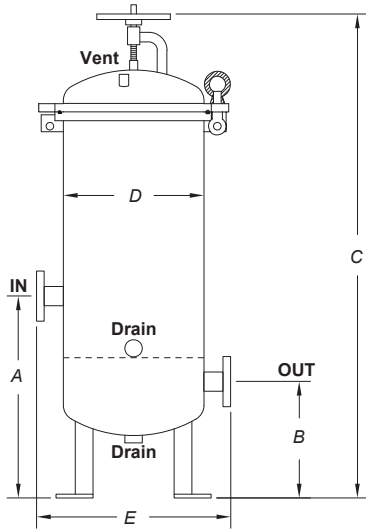

Filter Length	10, 20, 30, 40 inch
Number of Cartridges	8 ~ 173 rounds
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	2 ~ 15 inch Flange
Flow Rate	0 ~ 1600 CMH Depending on the specification and quantity of the filter cartridge
Max. Operating Pressure	10 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Beverage Industry