


# High-Flow Multi-Cartridge Filter Housings



| Model           | A    | B   | C    | øD   | E    |
|-----------------|------|-----|------|------|------|
| UFC20 8 ~ 12    | 700  | 350 | 1400 | 306  | 506  |
| UFC30 8 ~ 12    | 700  | 350 | 1655 | 306  | 506  |
| UFC40 8 ~ 12    | 700  | 350 | 1905 | 306  | 506  |
| UFC20 13 ~ 20   | 700  | 350 | 1415 | 406  | 606  |
| UFC30 13 ~ 20   | 700  | 350 | 1670 | 406  | 606  |
| UFC40 13 ~ 20   | 700  | 350 | 1920 | 406  | 606  |
| UFC20 21 ~ 28   | 700  | 350 | 1437 | 486  | 686  |
| UFC30 21 ~ 28   | 700  | 350 | 1692 | 486  | 686  |
| UFC40 21 ~ 28   | 700  | 350 | 1942 | 486  | 686  |
| UFC20 29 ~ 36   | 700  | 350 | 1523 | 560  | 760  |
| UFC30 29 ~ 36   | 700  | 350 | 1778 | 560  | 760  |
| UFC40 29 ~ 36   | 800  | 400 | 2028 | 560  | 760  |
| UFC20 37 ~ 46   | 800  | 400 | 1529 | 600  | 800  |
| UFC30 37 ~ 46   | 800  | 400 | 1784 | 600  | 800  |
| UFC40 37 ~ 46   | 800  | 400 | 2034 | 600  | 800  |
| UFC20 47 ~ 56   | 850  | 450 | 1587 | 650  | 850  |
| UFC30 47 ~ 56   | 850  | 450 | 1842 | 650  | 850  |
| UFC40 47 ~ 56   | 850  | 450 | 2092 | 650  | 850  |
| UFC20 57 ~ 81   | 950  | 500 | 1710 | 762  | 962  |
| UFC30 57 ~ 81   | 950  | 500 | 1965 | 762  | 962  |
| UFC40 57 ~ 81   | 950  | 500 | 2215 | 762  | 962  |
| UFC20 82 ~ 95   | 1000 | 550 | 1895 | 900  | 1100 |
| UFC30 82 ~ 95   | 1000 | 550 | 2150 | 900  | 1100 |
| UFC40 82 ~ 95   | 1000 | 550 | 2400 | 900  | 1100 |
| UFC20 96 ~ 135  | 1100 | 600 | 1985 | 1000 | 1200 |
| UFC30 96 ~ 135  | 1100 | 600 | 2240 | 1000 | 1200 |
| UFC40 96 ~ 135  | 1100 | 600 | 2490 | 1000 | 1200 |
| UFC20 136 ~ 155 | 1250 | 650 | 2090 | 1100 | 1300 |
| UFC30 136 ~ 155 | 1250 | 650 | 2345 | 1100 | 1300 |
| UFC40 136 ~ 155 | 1250 | 650 | 2595 | 1100 | 1300 |
| UFC20 156 ~ 173 | 1250 | 650 | 2095 | 1220 | 1400 |
| UFC30 156 ~ 173 | 1250 | 650 | 2350 | 1220 | 1400 |
| UFC40 156 ~ 173 | 1250 | 650 | 2600 | 1220 | 1400 |

unit: mm

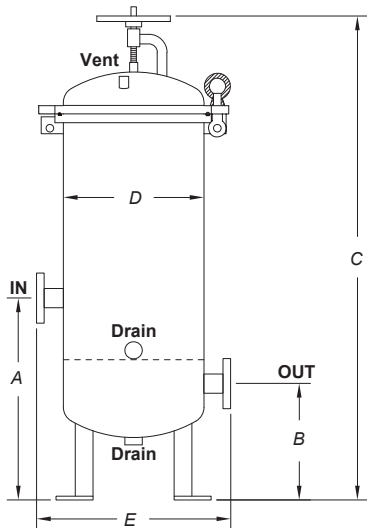

|                         |                                                                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Filter Length           | 10, 20, 30, 40 inch                                                                                                                            |
| Number of Cartridges    | 8 ~ 173 rounds                                                                                                                                 |
| Material                | SUS304, SUS316, SUS316L                                                                                                                        |
| Inlet/Outlet            | 2 ~ 15 inch Flange                                                                                                                             |
| Flow Rate               | 0 ~ 1600 CMH<br>Depending on the specification and quantity of the filter cartridge                                                            |
| Max. Operating Pressure | 10 bar                                                                                                                                         |
| Applications            | Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Beverage Industry |