



# 特大流量多支裝濾芯機

P-type High Flow Multi-Cartridge Filter Housings



濾芯規格	40", 60"
濾芯支數	2支 ~ 19支
材 質	SUS304, SUS316, SUS316L
口 徑	4", 5", 6", 8", 14", 16" 牙口、法蘭、衛生級接頭及各種規格
流 量	0 ~ 2200 CMH 依濾芯規格、數量而定
操作壓力	10 bar
適用範圍	RO前後置過濾, PCW過濾, 循環過濾, 化學品製程, 回收水過濾, 電著塗裝過濾, 飲料業

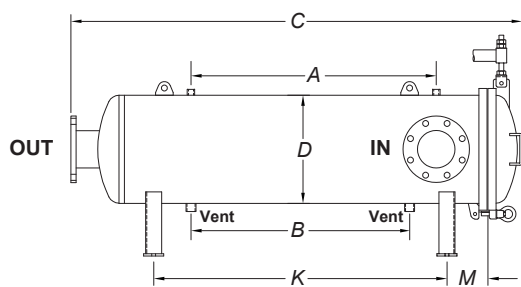

Model	A	B	C	øD	E	F	G	K	L	M
UFL40 2	920	820	1693	406	303	400	828	1100	270	150
UFL40 3	920	820	1693	406	303	400	828	1100	270	150
UFL40 4	920	820	1722	486	343	450	918	1100	370	150
UFL40 5	920	820	1778	508	354	450	929	1150	370	150
UFL40 6	920	820	1792	560	380	500	1005	1150	470	150
UFL40 7	920	820	1823	560	400	500	1025	1150	470	150
UFL40 8	920	820	1871	650	425	550	1100	1150	520	150
UFL40 9	920	820	1904	700	500	550	1131	1150	630	200
UFL40 10	920	820	1960	762	531	600	1217	1150	630	200
UFL40 12	920	820	1979	814	557	650	1293	1150	720	200

unit: mm