




ALL PTFE Filter Cartridges

- Specifically engineered for high-temperature, highly corrosive, and extractables-sensitive processes
- Optional pre-wetting service available to minimize system start-up time
- Manufactured in ISO-classified cleanroom environment
- Total Organic Carbon (TOC) levels monitored and controlled

Filter Media	Hydrophobic PTFE / Hydrophilic PTFE
Material	Support Layer: PTFE Cage, Core, End Caps: PFA O-ring : FEP Encapsulated Viton
Micron Rating	10, 20, 30, 50 nm 0.1, 0.2, 0.45, 1, 3, 5, 10 μ m
Length	4", 10", 20", 30", Other Customized Sizes
Outside Diameter	$\varnothing$ 69mm, $\varnothing$ 82mm
End Cap	2-222 Flat
Operating Data	Δ P : 5.0 bar at 25°C, 0.5 bar at 180°C
Metallic Extractables	to <3 μ g/device, Testing conducted for 11 metals
Applications	Wet Etch and Clean, Fine Chemicals, Solvents

✳ HYDROPHOBIC PTFE

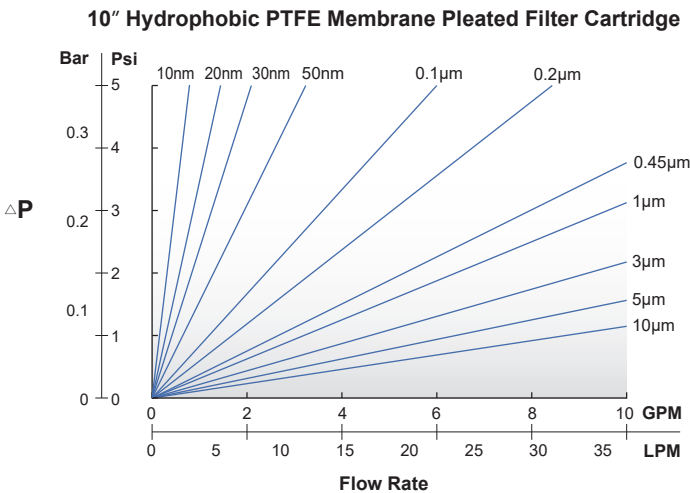

✳ HYDROPHILIC PTFE

