


High-Flow Multi-Bag Filter Housings



Model	Port	A	C	øD	E	N
UFB02 2	3" F	108	1410	406	584	254
UFB02 2	4" F	127	1447	406	660	292
UFB02 3	3" F	108	1455	508	686	343
UFB02 3	4" F	127	1492	508	724	343
UFB02 4	3" F	108	1506	560	698	330
UFB02 4	4" F	127	1545	560	737	330
UFB02 4	6" F	152	1616	560	876	356
UFB02 5	3" F	108	1506	560	698	330
UFB02 5	4" F	127	1545	560	737	330
UFB02 5	6" F	152	1635	600	876	356
UFB02 6	3" F	108	1520	600	724	356
UFB02 6	4" F	127	1558	600	763	356
UFB02 6	6" F	152	1635	600	876	356
UFB02 7	3" F	108	1658	762	813	406
UFB02 7	4" F	127	1695	762	864	406
UFB02 7	6" F	152	1772	762	927	406
UFB02 7	8" F	184	1848	762	991	432
UFB02 8	4" F	127	1695	762	864	432
UFB02 8	6" F	152	1772	762	991	432
UFB02 8	8" F	184	1848	762	1047	432
UFB02 9	6" F	152	1880	814	1016	457
UFB02 9	8" F	184	1955	814	1016	457
UFB02 10	6" F	152	1918	864	1092	483
UFB02 10	8" F	184	1993	864	1067	483
UFB02 10	10" F	216	2160	965	1219	533
UFB02 12	8" F	184	2085	965	1130	533
UFB02 12	10" F	216	2160	965	1219	533
UFB02 14	10" F	216	2267	965	1219	533

unit: mm

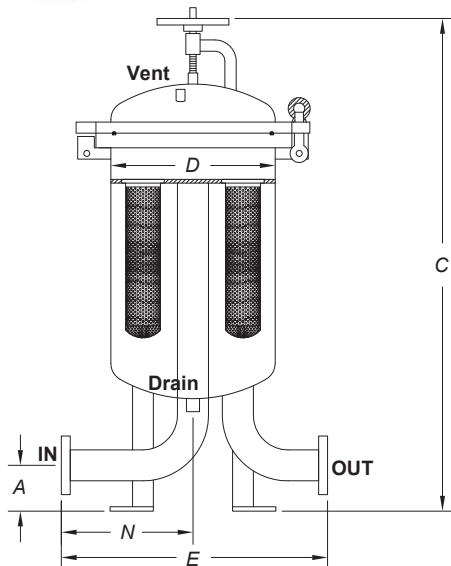

Filter Size	Bag #1, Bag #2
Number of Filter Bags	2 ~ 50
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	2" ~ 15" Flange
Flow Rate	0 ~ 2250 CMH Depending on the specification and quantity of the filter bag
Max. Operating Pressure	10 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Automotive, Paints, Inks, Resins and Coatings, Beverage Industry