


High-Flow Pleated Filter Cartridges

- With its pleated structure, the cartridge offers a large filtration area, low differential pressure, and stable high flow capacity. Its long service life minimizes replacement frequency, reducing downtime and operational risks
- Enable to be washed and reused, saving operation and cleaning cost

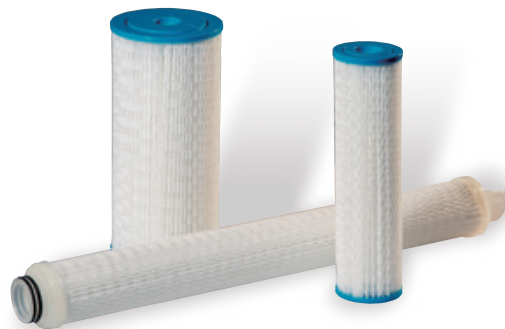

Material	Polypropylene, Polyester
Length	5", 10", 20", 30", 40" and Customization
Micron Rating	0.5, 1, 5, 10, 20, 30, 50, 100 μm
End Cap	DOE, 2-222 Flat, 2-222 Fin, 2-226 Flat, 2-226 Fin
Operating Data	ΔP : 3.0 bar at 25°C, 2.4 bar at 50°C
Applications	PCW, Pre RO/DI, Chemical Processing