
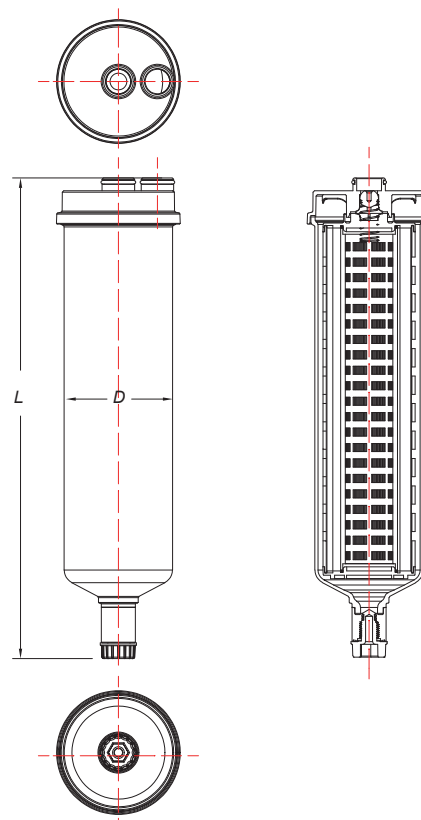


# Quick-Change Capsule Filter Cartridges

|                |                                                                                     |
|----------------|-------------------------------------------------------------------------------------|
| Specification  | 5" : Without Vent<br>10" : With Vent /Without Vent<br>20" : With Vent /Without Vent |
| Filter Media   | Polypropylene, Polyethersulfone, Nylon, PTFE, Glass Fiber                           |
| Micron Rating  | 0.1, 0.2, 0.3, 0.5, 0.8, 1, 3, 5, 10, 15, 20, 30 $\mu\text{m}$                      |
| Operating Data | $\Delta P$ : 4.8 bar at 25°C, 1.5 bar at 40°C                                       |
| Applications   | Coating, Gel, Ink, Slurry Filtration                                                |

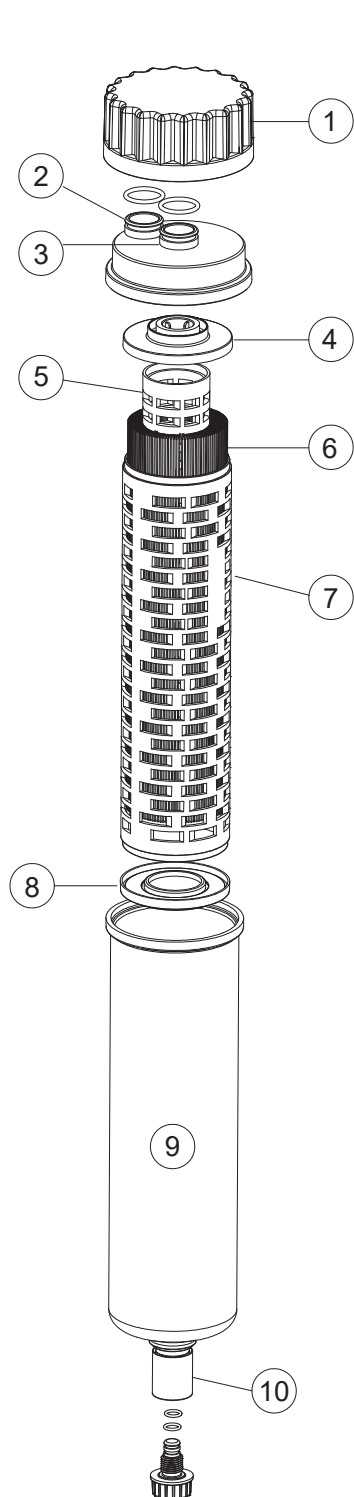

| Spec | Diameter | Length |
|------|----------|--------|
| 5"   | 76.5     | 156    |
| 10"  | 76.5     | 290    |
| 20"  | 76.5     | 544    |

unit: mm

| No. | Description      |
|-----|------------------|
| 1   | Top Cover        |
| 2   | Inlet            |
| 3   | Outlet           |
| 4   | End Cap          |
| 5   | Core             |
| 6   | Filter Media     |
| 7   | Filter Cartridge |
| 8   | End Cap          |
| 9   | Cage             |
| 10  | Vent             |