


Stainless Steel Bag Filter Housings



Filter Size	Bag #1, Bag #2, Bag #3, Bag #4
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	1", 1 1/2", 2", 2 1/2", 3", 4" NPT, BSP, Flange, Clamp and others
Flow Rate	#1: Up to 20 CMH #2: Up to 45 CMH #3: Up to 4.5 CMH #4: Up to 10 CMH
Closure Type	V-Clamp
Max. Operating Pressure	7 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Automotive, Paints, Inks, Resins and Coatings, Beverage Industry

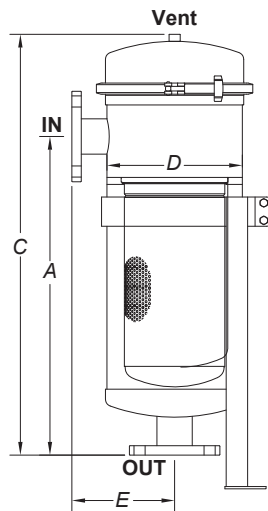

Model	A	C	øD	E
UFB01	545	727	232	175
UFB02	1000	1182	232	175
UFB03	355	532	180	150
UFB04	490	667	180	150

unit: mm