


Stainless Steel High Pressure Bag Filter Housings



Filter Size	Bag #1, Bag #2, Bag #3, Bag #4
Material	SUS304, SUS316, SUS316L
Inlet/Outlet	1", 1 1/2", 2", 2 1/2", 3", 4" NPT, BSP, Flange, Clamp and others
Flow Rate	#1: Up to 20 CMH #2: Up to 45 CMH #3: Up to 4.5 CMH #4: Up to 10 CMH
Closure Type	Swing Bolt
Max. Operating Pressure	10 bar
Applications	Reverse Osmosis Pretreatment, PCW Filtration, Circulating Filtration System, Chemical Processing, Reclaimed Water Treatment, Automotive, Paints, Inks, Resins and Coatings, Beverage Industry

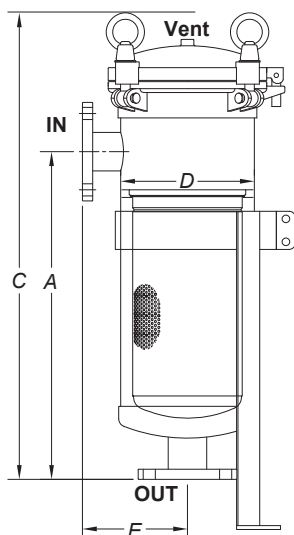

Model	A	C	øD	E
UFBG01	515	728	210	165
UFBG02	905	1134	210	165
UFBG03	340	532	140	130
UFBG04	450	642	140	130

unit: mm