



特大流量单支装滤芯机

P-type High Flow Single-Cartridge Filter Housings



滤芯规格	20", 40", 60"
滤芯支数	单支
材 质	SUS304, SUS316, SUS316L
口 径	2", 2 1/2", 3", 4" 牙口、法兰、卫生级接头及各种规格
流 量	20": 0 ~ 40 CMH 40": 0 ~ 85 CMH 60": 0 ~ 110 CMH
操作压力	7 bar
适用范围	RO前后置过滤, PCW过滤, 循环过滤, 化学品制程, 回收水过滤, 电著涂装过滤, 饮料业

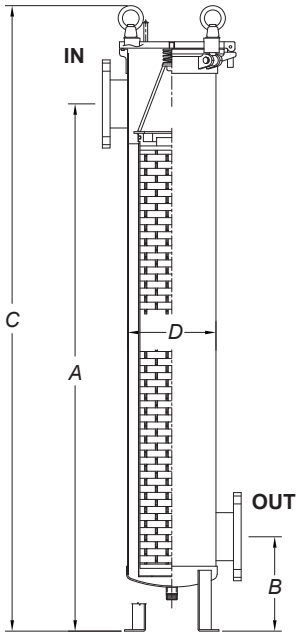

Model	A	B	C	øD	E
UFL20 1	745	225	979	210	330
UFL40 1	1255	225	1489	210	330

unit: mm