


高压型滤芯机

Stainless Steel High Pressure Cartridge Filter Housings



滤芯规格	5, 10, 20, 30, 40 inch
滤芯支数	3支, 4支, 5支, 7支, 9支, 12支
材 质	SUS304, SUS316, SUS316L
口 径	1, 1 1/2, 2, 2 1/2, 3, 4 inch 牙口、法兰、卫生级接头及各种规格
流 量	10" : 0 ~ 7 CMH 20" : 0 ~ 14 CMH 30" : 0 ~ 21 CMH 40" : 0 ~ 28 CMH 上述流量为一般PP熔喷式滤芯流量 实际流量会依滤材规格不同而有差别 可选用大流量滤芯来提高流量降低压差
滤机型式	螺栓型
操作压力	10 bar
适用范围	RO前后置过滤, PCW过滤, 循环过滤, 化学品制程, 回收水过滤, 饮料业

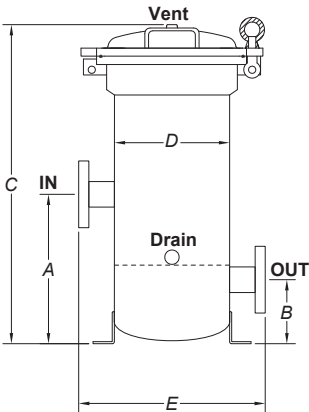

Model	A	B	C	øD	E
UFCG10 3 ~ 4	280	120	661	180	300
UFCG20 3 ~ 4	280	120	926	180	300
UFCG30 3 ~ 4	280	120	1181	180	300
UFCG40 3 ~ 4	280	120	1353	181	300
UFCG10 5 ~ 7	280	120	664	232	350
UFCG20 5 ~ 7	280	120	929	232	350
UFCG30 5 ~ 7	280	120	1184	232	350
UFCG40 5 ~ 7	280	120	1439	232	350
UFCG10 8 ~ 12	600	350	924	306	506
UFCG20 8 ~ 12	700	350	1179	306	506
UFCG30 8 ~ 12	700	350	1434	306	506
UFCG40 8 ~ 12	700	350	1689	306	506

unit: mm